

100 Watt Linear X-Band Outdoor High Power SSPA Block Upconverter



FEATURES

- *100W linear output power*
- *High efficiency GaN design*
- *Compact, rugged 32 lb. package for mobile applications*
- *Operates over -40°C to +60°C environment*

The **XTSLIN-100X-B1** High Power Solid State Block Upconverters (BUC) are a series of compact fully integrated antenna mount units designed for low cost operation and longevity. This unit generates over 100W of linear power providing the most linear output power available in a package this size. By using the latest in high efficiency GaN technology this linear power can be achieved with a prime power consumption of only 725 VA 100W output.


Intended for outdoor operation in challenging environments, the **XTSLIN-100X-B1** weighs only 32 lbs. Forced air cooling is implemented in the package to allow reliable operation over extended temperature ranges. The monitor and control (M&C) interface provides a component system status via Ethernet or RS-485 and RS-232.




PERFORMANCE SPECIFICATION

Parameters	XTSLIN-100X-B1	
FREQUENCY RANGE		
Output	7.9 to 8.4 GHz	
Input	950 to 1450 MHz	
LO Frequency	6950 MHz	
Input Level, w/o damage (maximum)	10 dBm	
Reference Signal Frequency	external 10 MHz	
10 MHz Power Level	0 dBm \pm 5 dB	
IF/Reference Input Impedance	50 Ohms	
OUTPUT POWER		
P_{SAT} (Peak, typical)	200W (53 dBm)	
P_{LINEAR} (Minimum)	100 W (50 dBm)	
GAIN		
Factory configurable small-signal gain	65 dB to 75 dB	
Field-user adjustable attenuation range	25 dB min, 0.1 dB steps	
Maximum SSG Variation Over		
Any Narrow Band	1.0 dB Pk-Pk	
Full Band	3.0 dB Pk-Pk	
Slope (maximum)	0.5 dB/MHz	
Stability, 24 hr. (maximum)	\pm 0.25 dB	
Stability, Temperature (maximum)	\pm 2.0 dB over temperature range at any frequency	
INTERMODULATION (maximum) WRT sum of two equal carriers	-25 dBc @ P_{LINEAR}	
SPECTRAL REGROWTH @ Linear Power	-30 dBc, 1 SR, OQPSK	
HARMONIC OUTPUT (maximum)	-60 dBc	
AM/PM CONVERSION (maximum)	2.0 deg/dB at Linear Power	
NOISE POWER (maximum)		
Transmit Band	-75 dBW/4 kHz	
Receive Band	-75 dBW/4 kHz	
IN-BAND DISCRETE SPURIOUS		
AC Power Line	Sum of fundamental and harmonic < -30 dBc	
Single Sideband	Sum of all other spurs < -36 dBc	
OUTPUT SPURIOUS @ P_{LIN}	-60 dBc	
PHASE NOISE (maximum)		
	10 Hz	-33 dBc/Hz
	100 Hz	-63 dBc/Hz
	1 kHz	-73 dBc/Hz
	10 kHz	-83 dBc/Hz
	100 kHz	-93 dBc/Hz
	1 MHz	-103 dBc/Hz
	10 MHz	-113 dBc/Hz
	100 MHz	-113 dBc/Hz
10 MHz REFERENCE PHASE NOISE (maximum)	10 kHz	-160 dBc/Hz
VSWR		
Input (maximum)	1.65:1	
Output (maximum)	1.3:1	

BLOCK DIAGRAM

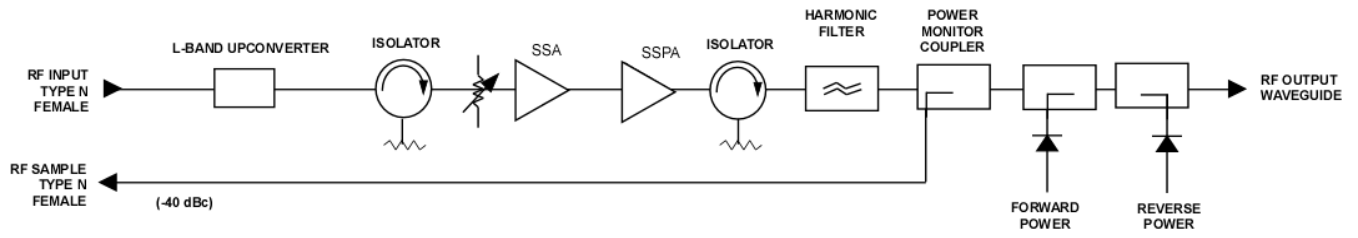

OUTLINE DRAWING

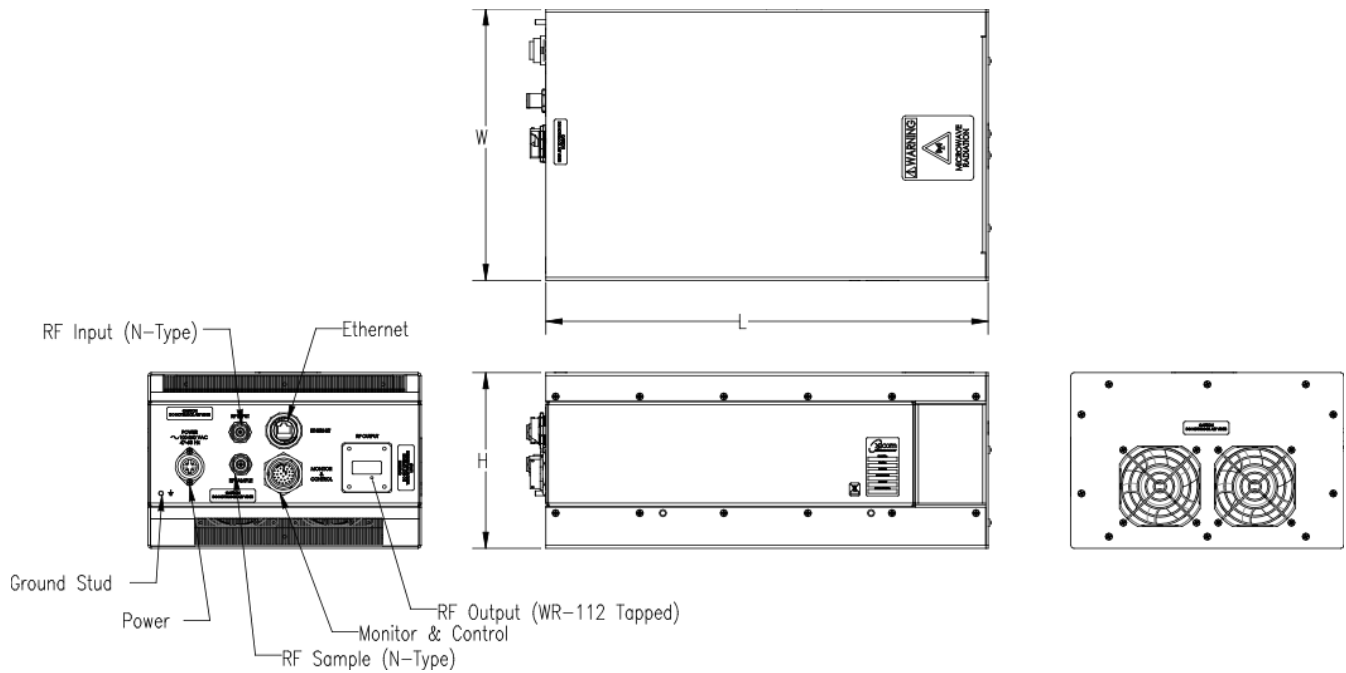

DIMENSIONS		
	Inches	Centimeters
H	6.8	17.3
W	10.5	26.7
L	17.0	43.2
WEIGHT = 32 lbs (14.5 kg)		

PRIME POWER

90 to 264 VAC
 47 to 63 Hz, Single Phase
 725 VA Typical @ P_{LIN}
 975 VA Maximum

ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 100% Condensing
ALTITUDE	12,000 Feet MSL Max.
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
REMOTE CONTROL	Transmit ON/OFF	RF Inhibit
	RF Attenuation	Fault Reset
	Summary Fault	
REMOTE STATUS	Transmit ON	Temperature
	RF Output Power	Fault Identification
	Reflected Power	
Form C Dry Contact Closure	Summary Fault	
COMPUTER	Hardware Interface:	2 Ports: RS-232 & RS-422/485 Ethernet
	Xicom Command Set	ASCII Commands
SERIAL PORT		
RF MONITOR PORT	-40 dB Coupling Value (Nominal)	

Headquarters

Comtech Xicom Technology, Inc.
 3550 Bassett Street
 Santa Clara, CA 95054
 USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
 4 Portland Business Center
 Manor House Lane
 Datchet
 Berkshire SL3 9EG
 United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
 150 Cecil Street
 #08-02
 Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com

