

200 Watt Linear Ku-Band Outdoor High Power SSPA Block Upconverter



FEATURES

- *200W linear output power*
- *High efficiency GaN design*
- *Compact, rugged 48 lb. package for mobile applications*
- *Operates over -40°C to +60°C environment*

The **XTSLIN-200K-B1** High Power Solid State Block Upconverters (BUC) are a series of compact fully integrated antenna mount units designed for low cost operation and longevity. This unit generates over 200W of linear power, providing the most linear output power available in a package this size. By using the latest in high efficiency GaN technology this linear power can be achieved with a prime power consumption of only 1450 VA typical.


Intended for outdoor operation in challenging environments, the **XTSLIN-200K-B1** weighs only 48 lbs. Forced air cooling is implemented in the package to allow reliable operation over extended temperature ranges. The monitor and control (M&C) interface provides a component system status via Ethernet or RS-485 and RS-232.




PERFORMANCE SPECIFICATION

Parameters	XTSLIN-200K-B1	
FREQUENCY RANGE		
Output	13.75 to 14.5 GHz	
Input	950 to 1700 MHz	
LO Frequency	12.8 GHz	
Input Level, w/o damage (maximum)	10 dBm	
Reference Signal Frequency	external 10 MHz	
10 MHz Power Level	0 dBm \pm 5 dB	
IF/Reference Input Impedance	50 Ohms	
OUTPUT POWER		
P _{SAT} (Peak, typical)	400 W (56.0 dBm)	
P _{LINEAR} (Minimum)	200 W (53.0 dBm)	
GAIN		
Small-signal gain (minimum)	65 dB	
Adjustable attenuation range	25 dB min, 0.1 dB steps	
Maximum SSG Variation Over		
Any Narrow Band	\pm 0.5 dB Pk-Pk/40 MHz	
Full Band	3.0 dB Pk-Pk	
Slope (maximum)	0.05 dB/MHz	
Stability, 24 hr. (maximum)	\pm 0.25 dB	
Stability, Temperature (maximum)	\pm 2.0 dB over temperature range at any frequency	
SPECTRAL REGROWTH @ Linear Power	-26 dBc, 1 SR, OQPSK (-30 dBc with optional linearizer)	
HARMONIC OUTPUT (maximum)	-60 dBc	
AM/PM CONVERSION (maximum)	2.0 deg/dB at Linear Power	
NOISE POWER (maximum)		
Transmit Band	-75 dBW/4 kHz	
Receive Band	-150 dBW/4 kHz	
IN-BAND DISCRETE SPURIOUS		
AC Power Line	Sum of fundamental and harmonic < -30 dBc	
Single Sideband	Sum of all other spurs < -36 dBc	
OUTPUT SPURIOUS @ P _{LIN}	-60 dBc	
PHASE NOISE (maximum)		
	10 Hz	-33 dBc/Hz
	100 Hz	-63 dBc/Hz
	1 kHz	-73 dBc/Hz
	10 kHz	-83 dBc/Hz
	100 kHz	-93 dBc/Hz
	1 MHz	-103 dBc/Hz
	10 MHz	-113 dBc/Hz
	100 MHz	-113 dBc/Hz
10 MHz REFERENCE PHASE NOISE (maximum)	10 kHz	-160 dBc/Hz
VSWR		
Input (maximum)	1.5:1	
Output (maximum)	1.3:1	

BLOCK DIAGRAM

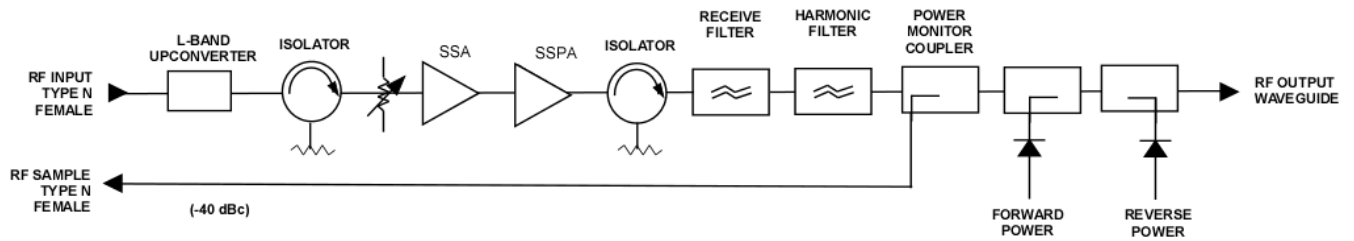

DIMENSIONS

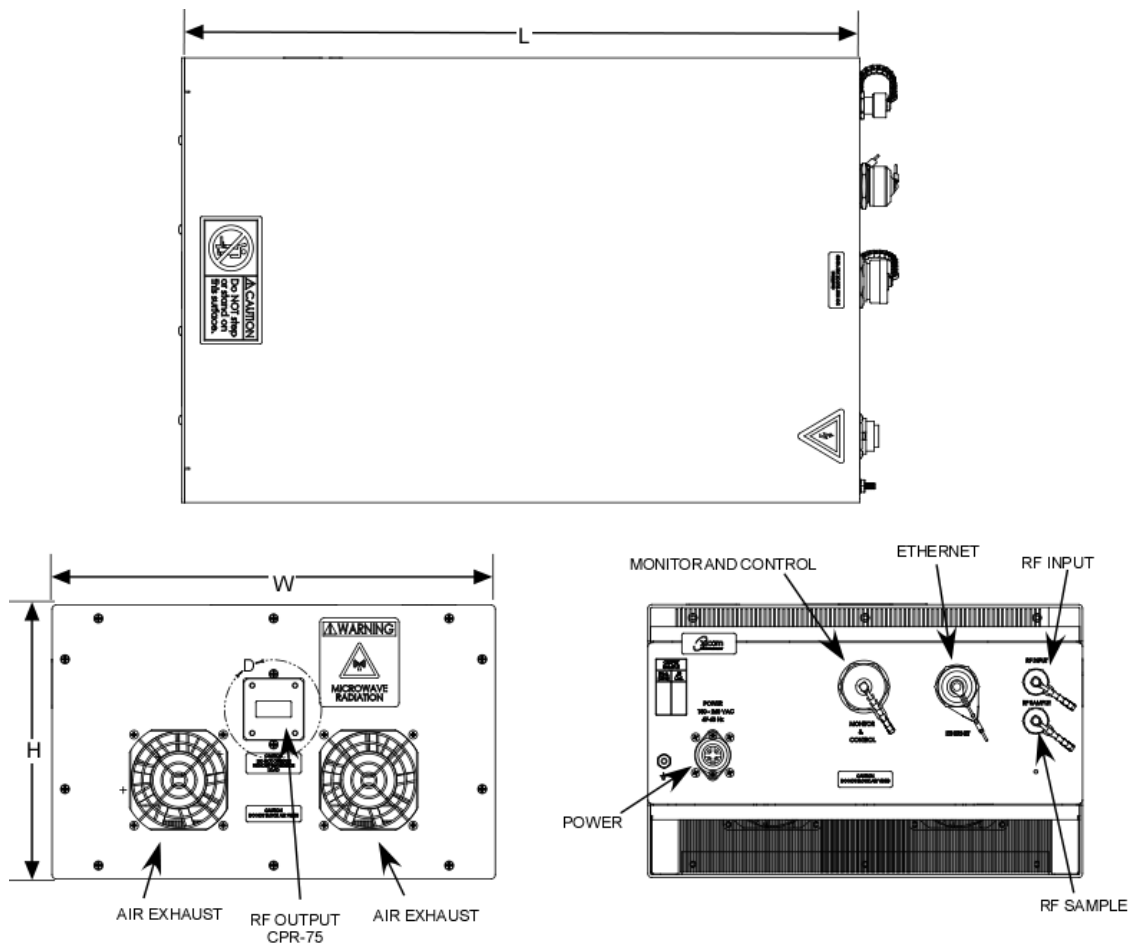

DIMENSIONS		
	Inches	Centimeters
H	8.0	20.32
W	14.0	36.56
L	19.0	48.26
WEIGHT = 48 lbs typical (21.77 kg)		

PRIME POWER

180 to 260 VAC
47 to 63 Hz, Single Phase
1450 VA Typical @ P_{LN}

ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C (2°C/1000 Feet Derating)
HUMIDITY	Up to 100% Condensing
ALTITUDE	12,000 Feet MSL Max.
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
REMOTE CONTROL	Transmit ON/OFF	RF Inhibit
	RF Attenuation	Fault Reset
	Summary Fault	
REMOTE STATUS	Transmit ON	Temperature
	RF Output Power	Fault Identification
	Reflected Power	
Solid State Relay	Summary Fault	
COMPUTER	Hardware Interface:	2 Ports: RS-232 & RS-422/485 Ethernet
SERIAL PORT	Xicom Command Set	ASCII Commands
RF MONITOR PORT	-40 dB Coupling Value (Nominal)	

OPTIONS

- SNMP
- Linearizer
- Internal Reference

Headquarters

Comtech Xicom Technology, Inc.
3550 Bassett Street
Santa Clara, CA 95054
USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

Europe Sales Office

Comtech Xicom Technology Europe, LTD
4 Portland Business Center
Manor House Lane
Datchet
Berkshire SL3 9EG
United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Asia Sales Office

Comtech Xicom Technology
150 Cecil Street
#08-02
Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com